AD-A077 337

TECHNICAL LIBRARY

Tock Lebrary

AD/ 077 337

AD-E400 369

CONTRACTOR REPORT ARLCD-CR-79021

MASS DETONATION TESTS OF AGITATED HMX SLURRIES

GEORGE PETINO, JR.
HAZARDS RESEARCH CORPORATION
DENVILLE. NJ

JAMES D. TURNER ARRADCOM

OCTOBER 1979



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND
LARGE CALIBER
WEAPON SYSTEMS LABORATORY
DOVER, NEW JERSEY

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED.

The views, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy or decision, unless so designated by other documentation.

Destroy this report when no longer needed. Do not return it to the originator.

The citation in this report of the names of commercial firms or commercially available products or services does not constitute official endorsement or approval of such commercial firms, products, or services by the United States Government.

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER 2. GOVT ACCESSION NO	. 3. RECIPIENT'S CATALOG NUMBER
Contractor Report ARLCD-CR-79021	•
4. TITLE (and Subtitle)	S. TYPE OF REPORT & PERIOD COVERED
Mass Detonation Tests of Agitated HMX Slurries	
	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(e)	8. CONTRACT OR GRANT NUMBER(8)
George Petino, Jr., P.E., Hazards	
Research Corporation &	DAAK10-77-C-0189
James D. Turner, ARRADCOM 9. PERFORMING ORGANIZATION NAME AND ADDRESS	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
	AREA & WORK UNIT NUMBERS
Hazards Research Corporation	
Denville, New Jersey 07834	0
11. CONTROLLING OFFICE NAME AND ADDRESS	12. REPORT DATE
Commander, ARRADCOM	October 1979
STINFO, TSD (DRDAR-TSS)	13. NUMBER OF PAGES
Dover, NJ 07801	32
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)	1S. SECURITY CLASS. (of this report)
LCWSL, Energetic Systems Process Division	
Mechanical Process & Plant Design Branch	Unclassified
ARRADCOM, Dover, NJ 07801	15e. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of thie Report)

Approved for public release; distribution unlimited.

- 17. DISTRIBUTION STATEMENT (of the ebstract entered in Block 20, if different from Report)
- 18. SUPPLEMENTARY NOTES
- 19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Mass detonable
Agitated, aqueous HMX slurries
Agitated, spent acid and HMX slurries
HMX slurry mass detonability

20. ABSTRACT (Continue on reverse citie if necessary and identity by block number)

A test program has been performed to determine the mass detonability of agitated, HMX slurries in 1/1000 volumetric scale steel tanks (5 Gal) that were initiated on the bottom with a 100 gram Composition C-4 charge. No mass detonations were observed in each of the 20 replicate tests performed on both 8% crude HMX/92% spent acid and 20% recrystallized HMX/80% water slurries respectively. Results indicate that similar agitated,

20. Abstract (Continued)

in-process material of equal or lower HMX concentration should be assigned a non-mass-detonable designation. These slurries should not be included in determining the total Class 1.1 explosive load limit of explosives manufacturing buildings when they are in the agitated condition.

PREFACE

The experiments reported on in this program were performed to determine the mass detonability of agitated in-process HMX material in stirred tanks. These tanks were scaled down versions of those found in a typical HMX manufacturing process. The tanks and their slurry contents represent the process slurry conditions found in the nitrolysis, recrystallization and filtration buildings. Similar tests were conducted in the past on RDX slurries. These tests provided results which allowed the explosive classification of agitated RDX slurry materials to be lowered. Picatinny Arsenal Technical Report No. 4949, entitled, "Mass Detonation Testing of Agitated RDX slurries," dated June 1976 by Francis Strong contains details of this previous effort. Mr. Francis Strong was project Engineer on the previous program and was responsible for the initiation of the present effort.

TABLE OF CONTENTS

			Page	No.
Su	mma	ary	1	
In	trodu	action	2	
Ex	peri	mental Program	3	
		terials	3	
		uipment scription of Experiments	3	
		scription of Experimental Methods	4	
	$\mathbf{E}\mathbf{x}$	perimental Results	5	
Co	nclu	sions	7	
Re	com	mendations	8	
Di	stril	oution List		
Ta	bles			
	1	Sample analysis	9	
	2	Results of mass detonation tests on agitated, crude HMX slurries	10	
	3	Results of mass detonation tests on agitated, Class A HMX slurries	12	
Fi	gure	· s		
	1	Test container details	14	
	2	Internal details of container and impeller	15	
	3	Test container with booster in position	16	
	4	Air operated stirrer, impeller, and tank lid	17	
	5	HMX water slurry test set-up	18	
	6	Test container after HMX water slurry test	19	
	7	Water blank test set-up	20	
	8	Test container after water blank test	21	

9	HMX spent acid slurry test set-up	22
10	Test site after HMX spent acid slurry test	23
11	Test container after HMX spent acid slurry test	24
	•	

SUMMARY

A test program has been performed to determine the mass detonability of agitated, HMX slurries in 1/1000 volumetric scale steel tanks (5 gal) that were initiated on the bottom with a 100 gram Composition C-4 charge. No mass detonations were observed in each of the 20 replicate tests performed on both 8% crude HMX/92% spent acid and 20% recrystallized HMX/80% water slurries. Results indicate that similar agitated, in-process material of equal or lower HMX concentration should be assigned a non-mass-detonable designation. These slurries should not be included in determining the total Class 1.1 explosive load limit of explosives manufacturing buildings when they are in the agitated condition.

INTRODUCTION

This report summarizes the results of a series of experiments performed by Hazards Research Corporation, Denville, New Jersey under the technical direction of the Large Caliber Weapon Systems Laboratory, Energetic Systems Process Division, Mechanical Process & Plant Design Branch of ARRADCOM, Dover, New Jersey. The work was funded under Contract No. DAAK10-77-C-0189.

The objective of this program was to determine if 8% crude HMX/92% spent acid and 20% recrystallized HMX/80% water slurries are mass detonable under agitated conditions in 1/10th linear scale (approximately 1/1000th volumetric scale) tanks when initiated on the bottom center by a 100 gram Composition C-4 booster charge.

The in-process HMX material located in existing HMX manufacturing facilities as well as in the proposed RDX/HMX facility is presently considered to be Class 1.1 material (mass detonable). Results of this program are to be used to reclassify agitated material containing up to 8 weight percent crude HMX or up to 20 weight percent recrystallized HMX under the condition of assured constant agitation. This reclassification would result in substantial capital cost savings at both existing and planned HMX manufacturing facilities.

EXPERIMENTAL PROGRAM

Materials

The following materials were supplied by ARRADCOM for use in this test program:

- (1) HMX, intermediate Class A, code 51004, batch #662 HW-282
- (2) HMX, intermediate Crude, code 51000, batch #6 HBC-14
- (3) Composition C-4

Hazards Research Corporation furnished the following materials:

- (1) Cylindrical carbon steel and 304 stainless steel tanks, 30.5 cm (12 in) dia x 30.5 cm high x 0.095 cm (0.038 in) wall thickness with a dished radius of 30.5 cm
- (2) E-83 blasting caps
- (3) Wooden test stands
- (4) Spent acid, 80% glacial acetic acid/20% water
- (5) E-Cord by Ensign Bickford
- (6) Lead witness plates, $10 \text{ cm} (4 \text{ in}) \times 10 \text{ cm} \times 0.107 \text{ cm} (0.042 \text{ in})$ thick
- (7) Air-driven stirrer motors, 1/2 hp, M.F. Fawcett Co.
- (8) Mixed flow impellers, high lift type, M.F. Fawcett Co.

Description of Experiments

The 42 tests performed during this program were conducted using the test container shown in Figure 1. It was suspended 15.2 cm (6 in) above the ground by a plywood support stand. Figure 2 presents the internal details of the container and the location of the impeller. Figure 3 is a photograph which shows the location of the 100 gram, Composition C-4 booster on the test container. The one-half horse-power air motor, and 10.2 cm (4 in) diameter high lift impeller are presented in Figure 4. A photograph of a typical test set-up is presented in Figure 5.

A typical test sequence started with the taping of a 100 gram, Composition C-4, conical booster onto the bottom center of the test container. The container was then positioned in its plywood support

stand. A length of E-cord was taped to the side of the container and strung out a distance of 5 meters (16.4 ft). A lead witness plate was folded around the E-cord and placed under a barricade. Pre-weighed portions of wet HMX and the test liquid were then poured into the test container. The air motor was positioned in the center of the tank and the air was turned on. After approximately five minutes of mixing time, a portable, photoelectric tachometer was used to set the agitator speed at 1,000 rpm. Two 40 ml samples were then extracted from the slurry. One sample was taken from the bottom of the tank and the second sample from the top. These samples were taken to the laboratory where they were later analyzed for percentage HMX concentration.

The final step involved the arming of the C-4 booster with an E-83 blasting cap and the remote detonation of the cap. Before-and-after still photographs documented each test. Because of the go, no-go nature of the tests, no instrumentation was required.

Description of Experimental Methods

Preparation of Slurries

All HMX used on this program was received packaged in duck cloth storage bags which were encased in plastic bags. Intermediate Class A HMX contained an average of 6.4% volatiles while the intermediate Crude HMX averaged 54% volatiles. The volatiles content was taken into account in all calculations of explosive weight concentration. Volatiles content was determined by taking four samples of wet HMX from four different locations within each duck cloth bag. These samples were weighed and placed in an oven and dried to determine volatiles content. The average value of these four readings was then used to calculate the volatiles content of the HMX. This value was then used to determine the amount of wet HMX required to give the equivalent dry weight of HMX called for in the experiment. The volatiles in the HMX were then subtracted from the total liquid requirement to yield the desired solids concentration of the slurry.

Preparation of Spent Acid

Spent acid was made by mixing 80% glacial acetic acid with 20% water.

Booster Configuration

The boosters were made by hand tamping C-4 into the shape of a frustum of a right circular cone using a plastic mold. The two diameters were 3.3 cm (1.3 in) and 6.1 cm (2.4 in) with a height of 4 cm (1.6 in). Each booster weighed 100 grams.

Agitator Speed

Proper agitation speed was determined experimentally using sand and water. A 20% sand and 80% water slurry was placed into a 19 liter (5 Gal) glass container of the same physical dimensions as the steel test container. Impeller speed was increased until the speed was attained at which no sand remained on the bottom of the tank. This was approximately 800 rpm. A value of 1,000 rpm was then selected to provide an adequate safety margin.

Characterization of Detonation Propagation Phenomena

The determination of whether or not the booster-initiated detonation propagated through the slurries was made by physical inspection and a lead witness plate. Prior to testing explosive slurries, a water blank test and an acetic acid blank test were performed. These were reference tests which were used to determine the effect of the booster on the test container. Figure 7 shows the water blank test set-up while Figure 8 reveals the damage that resulted from detonation of the booster. It is seen that the tank ruptured at the bottom and up the length of the side wall. It banana peeled back from the center of the tank. This result is typical for a non-propagating reaction.

Mass detonation of the contents of a tank would result in complete fragmentation of the tank wall. Very few pieces of the tank would be recovered after the test. In addition, the E-cord would be initiated by the shock wave and it would split the lead witness plate in half. Finally, the air motor and impeller would be fragmented.

One unagitated, 8% HMX/92% spent acid test was performed to serve as the basis for comparison to a mass detonation. As anticipated, the lead witness plate was split in half and the tank was completely fragmented.

Experimental Results

A total of 40 experiments were performed on this program to determine the detonability of agitated HMX slurries in scaled down process tankage. The results of the sample analysis performed on 40 ml samples taken prior to each test are presented in Table 1. Table 2 contains the results of the 20 replicate tests performed on agitated, crude HMX slurries at 8% HMX/92% spent acid concentrations. Table 3 presents the results of 20 replicate tests performed on agitated, Class A HMX slurries at 20% HMX/80% water weight concentrations.

It is seen that no mass detonation occurred in any of the 40 tests performed on this program. Each tank was ruptured by the detonation of the booster. Unreacted HMX was distributed over the surface of the test site. All tanks were recovered and all witness plates were intact. Figures 5 and 6 are before and after photographs of experiment number 33. Figures 9, 10, and 11 show the before and after photographs of

experiment number 2. It is seen that there is very little difference in physical damage to the tanks.

CONCLUSIONS

Results of 40 mass detonation tests on agitated HMX slurries in scaled down steel process tanks, indicate that neither 8% crude HMX/92% spent acid slurries nor 20% recrystallized HMX/80% water slurries mass detonated. These test results provide a logical basis for assigning a non-mass-detonable classification to similar in-process slurried HMX where the HMX is of equal or lower concentration as long as agitation is assured.

RECOMMENDATIONS

It is recommended that a non-mass-detonable designation be assigned to in-process agitated slurry material containing:

- (1) Up to 8% crude HMX
- (2) Up to 20% recrystallized HMX

These HMX slurries should not be included in determining the total Class 1.1 explosive load limit of the explosive manufacturing buildings as long as agitation is assured.

Table l Sample analysis

Test	8% HMX	eries using /92% spent acid X wt percent Bottom	Test	20% HM	es using X/80% water wt percent Bottom
1	7.0	8.8	21	18.7	16.9
2	7.9	7.0	22	17.0	19.8
3	7.4	8.1	23	18.9	20.1
4	7.9	8.6	24	16.5	19.9
5	8.4	7.9	25	17.6	20.4
6	8.2	7.9	26	18. 4	19.5
7	9.3	9.0	27	17.0	18.9
8	8.8	7.2	28	22.0	19.0
9	7.3	8.2	29	20.0	20.5
10	8.3	6.9	30	19.0	18.5
11	8.4	7.7	31	20.0	19.0
12	8.5	6.9	32	18.0	20.0
13	8.1	6.9	33	18.0	19.0
14	8.8	6.2	34	18.0	19.8
15	7.8	6.9	35	19.0	19.0
16	8.9	8.0	36	18.0	19.5
17	9.7	6.2	37	22.0	19.0
18	7.1	8.1	38	18.0	20.1
-19	6.0	7.8	38	18.0	19.3
20	9.0	6.9	40	17.0	19.6

Table 2

Results of mass detonation tests on agitated, crude HMX slurries

Resulta	(-)	(-)	(-)	(-)	(-)	(-)	-)	(-)	(-)	-	(-)
Physical evidence ^b	Tank ruptured	Tank ruptured	Tank ruptured	Tank ruptured	Tank ruptured	Tank ruptured	Tank ruptured	Tank ruptured	Tank ruptured	Tank ruptured	Tank ruptured
Agitator Speed (rpm)	0	1025	1055	1000	1000	1020	1000	1000	1050	1000	1050
Slurry temp.	14	14	14	14	14	14	14	15	15	15	15
sition (g) HMX	0	1, 32	1, 32	1, 32	1, 32	1, 32	1, 32	1,32	1, 32	1, 32	1,32
Slurry composition wt% wt (kg) HMX acid HMX	15, 14	15, 14	15, 14	15, 14	15, 14	15,14	15,14	15, 14	15, 14	15, 14	15, 14
$\frac{\mathrm{Slurr}}{\mathrm{wt}\%}$	0	∞	∞	∞	œ	œ	œ	œ	œ	∞	∞
Test No.	А	1	2	3	4	2	9	7	∞	6	10
Liquid	80% acetic	(aqueous)									

a(+) indicates booster initiated detonation propagated.

(-) indicates no propagation.

bAll tests were conducted in cylindrical steel tanks, 30.5 cm (12 in) dia x 30.5 cm high x 0.095 cm (0.038 in) wall thickness with 30.5 cm dished radius.

Table 2

Results of mass detonation tests of agitated, crude HMX slurries (cont.)

	S111	יי ביי	eition	Slurry	Agitation		
Test No.	wt% HMX	wt% wt (kg) HMX acid HMX	kg) HMX	temp (°C)	Speed (rpm)	Physical evidenceb	Resulta
_	8	15,14	. 1.32	13	1055	Tank ruptured	-)
12	œ	15.14	1,32	10	1000	Tank ruptured	(-)
13	∞	15.14	1,32	10	1050	Tank ruptured	-)
14	∞	15.14	1,32	11	1000	Tank ruptured	-
15	œ	15.14	1,32	11	1000	Tank ruptured	-)
16	∞	15.14	1,32	80	1020	Tank ruptured	-)
17	∞	15.14	1,32	8	1000	Tank ruptured	-)
18	∞	15.14	1,32	6	1000	Tank ruptured	<u>-</u>)
19	∞	15,14	1,32	œ	1000	Tank ruptured	-
20	8	15,14	1.32	∞	1000	Tank ruptured	-)

a(+) indicates booster initiated detonation propagated.

⁽⁻⁾ indicates no propagation.

bAll tests were conducted in cylindrical steel tanks, 30.5 cm (12 in) dia \times 30.5 cm high \times 0.095 cm (0.038 in) wall thickness with 30.5 cm dished radius.

Results of mass detonation tests on agitated, Class A HMX slurries

Liquid

water

	Resulta	(-)	-)	-)	-)	-	-)	(-)	-)	(-)	(-)	(-)
	Physical Evidence ^b	Tank ruptured	Tank ruptured	Tank ruptured	Tank ruptured	Tank ruptured	Tank ruptured					
Agitator	Speed (rpm)	0	1025	1050	1020	1050	1070	1020	1025	1025	1025	1100
Slurry	temp (°C)	14	14	14	14	11	11	11	12	12	12	12
sition	(g) HMX	0	3,79	3.79	3,79	3,79	3, 79	3, 79	3, 79	3.79	3, 79	3, 79
rry composition	wt (kg)	15, 14	15.14	15.14	15, 14	15.14	15.14	15, 14	15, 14	15, 14	15, 14	15.14
Slurr	wt% HMX	0	20	20	20	20	20	20	20	20	20	20
	Test No.	Д	21	22	23	24	25	97	2.7	28	53	30
	1											

a(+) indicates booster initiated detonation propagated.

(-) indicates no propagation.

bAll tests were conducted in cylindrical steel tanks, 30.5 cm (12 in) dia \times 30.5 cm high \times 0.095 cm (0.038 in) wall thickness with 30.5 cm dished radius.

Table 3

Results of mass detonation tests on agitated, Class A HMX slurries (cont.)


	Resulta	-	(-)	(-)	<u>-</u>)	(-)	<u>-</u>)	<u>-</u>)	<u>-</u>)	-)	(-)
	Physical evidence ^b	Tank ruptured									
Agitator	Speed (rpm)	1025	1100	1100	1050	950	1050	1075	1125	1025	1100
Slurry	temp (°C)	12	12	∞	8	∞	∞	∞	∞	∞	∞
ition	HWX	3,79	3, 79	3,79	3, 79	3, 79	3, 79	3, 79	3.79	3,79	3, 79
rry composition	wt (kg	15.14	15, 14	15.14	15, 14	15.14	15, 14	15, 14	15, 14	15, 14	15, 14
Slurr	wt% HMX	20	20	20	20	20	20	20	20	20	20
	Test No.	31	32	33	34	35	36	37	38	39	40
	Liquid	water		•						F1	

a(+) indicates booster initiated detonation propagated.

⁽⁻⁾ indicates no propagation.


bAll tests were conducted in cylindrical steel tanks, 30.5 cm (12 in) dia. x 30.5 cm high x 0.095 cm (0.038 in) wall thickness with 30.5 cm dished radius.

Material of Construction: Carbon or Stainless Steel

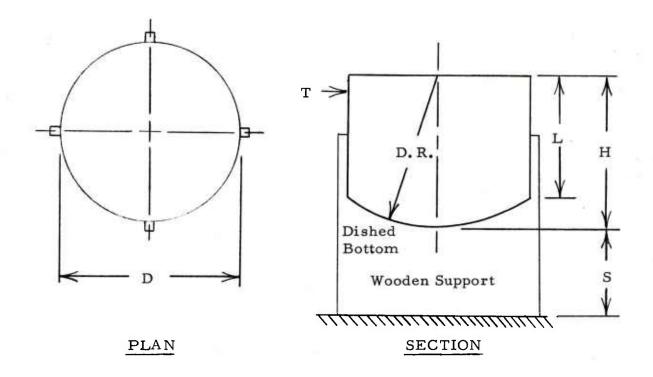

D = 30.5 cm (12 in) H = 30.5 cm (12 in) L = 26.2 cm (10.3 in) S = 15.2 cm (6 in) D.R. = 30.5 cm (12 in) T = 0.095 cm (0.038 in)

Fig 1 Test container details

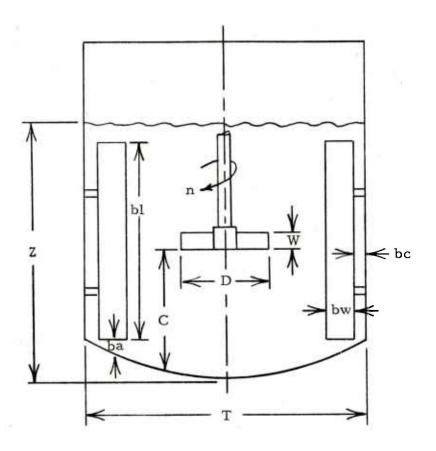

7.6 cm (3 in), Turbine clearance C D 10.2 cm (4 in), Turbine diameter 30.5 cm (12 in), Tank diameter 1.3 cm (0.5 in), Blade width T W 1000 rpm, Shaft speed n 22.9 cm (9 in), Liquid depth 15.2 cm (6 in), Height of liquid \boldsymbol{Z} Z-C above impeller Distance to bottom of side wall ba = 1.3 cm (0.5 in), Clearance bc between tank wall and baffle 2.5 cm (1.0 in), Baffle width bw 24.1 cm (9.5 in), Baffle length bl

Fig 2 Internal details of container and impeller



Fig 3 Test container with booster in position

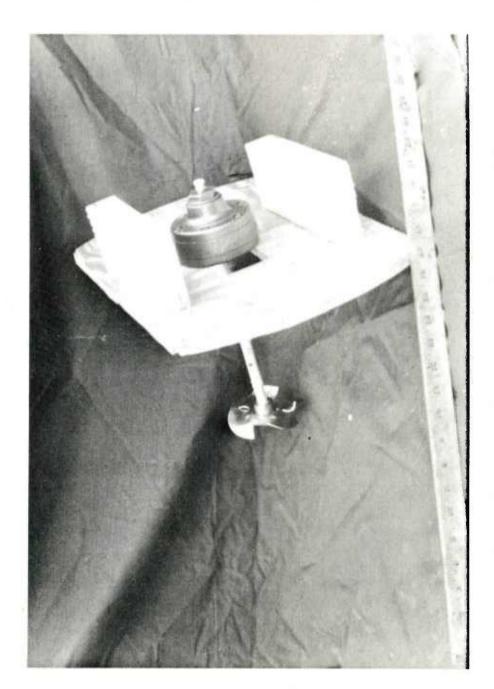


Fig 4 Air operated stirrer, impeller, and tank lid

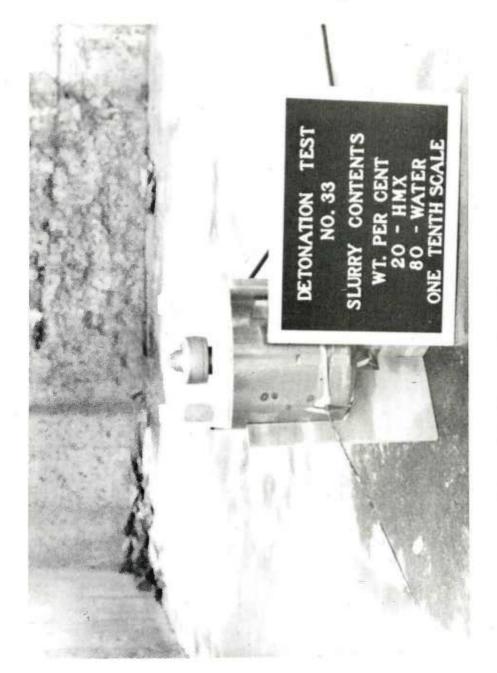


Fig 5 HMX water slurry test set-up



Fig 6 Test container after HMX water slurry test

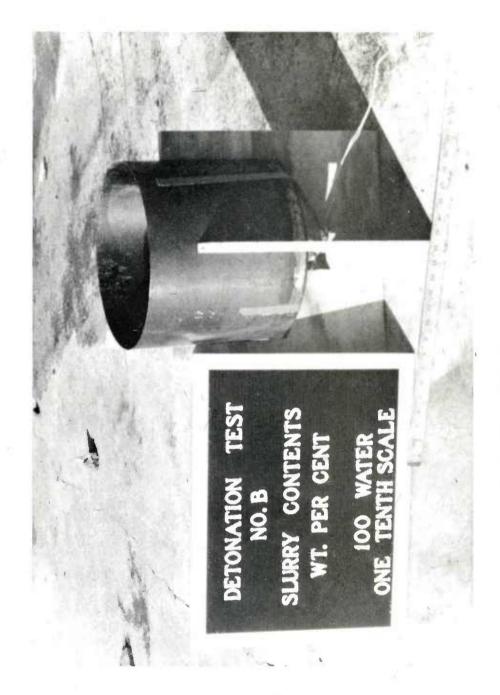


Fig 7 Water blank test set-up



Fig 8 Test container after water blank test



Fig 9 HMX spent acid slurry test set-up

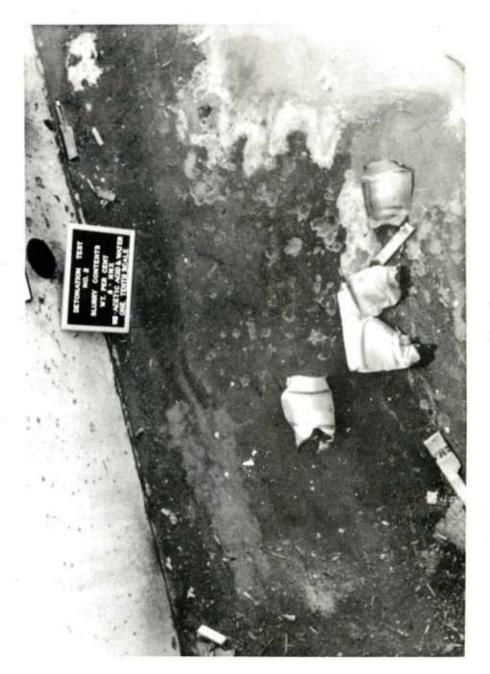


Fig 10 Test site after HMX spent acid slurry test



Fig 11 Test container after HMX spent acid slurry test

DISTRIBUTION LIST

		COPY NO.
Comman	der	
ARRADO		_
ATTN:	DRDAR-CG	1
	DRDAR-LC	2
	DRDAR-LCM-M	3-15
	DRDAR-LCM-E	16
	DRDAR-LCM-S	17
	DRDAR-SF	18 19-22
	DRDAR-TS	23
	DRDAR-QA	23
Dover,	NJ 07801	
Chairn	nan	
Depart	ment of Defense Explosive Safety Board	24 25
Forres	stal Bldg., GB-270	24-25
Washir	ngton, DC 20314	
	istrator	
	se Documentation Center	26-27
	Accessions Division	20-27
	on Station	
Alexai	ndria, VA 22304	
Comman		
Depar	tment of the Army	
Offic	e, Chief Research, Development	28
4 m m 3 I	and Acquisition	20
	DAMA-CSM-P ngton, DC 20310	
wasni	ngton, bc 20310	
Offic	e, Chief of Engineers	
	DAEN-MCZ	29
Washi	ngton, DC 20314	
Comma	nder	
	Army Materiel Development and	
	Readiness Command	_
ATTN:	DRCSF	30
	DRCDE	31
	DRCRP	32
	DRCIS	33
-	Eisenhower Avenue	
Alexa	ndria. VA 22304	

Commander	
US Army Materiel Development & Readiness	
Command	
Installation and Services Agency	
ATTN: DRCIS-RI	34
Rock Island, IL 61299	
NOCK ISTANC, IL CIESS	
Commander	
US Army Production Equipment Agency	35
ATTN: DRXPE-PI	33
Rock Island, IL 61299	
	6
Project Manager for Munitions Production	
Base Modernization and Expansion	
US Army Materiel Development and	
Readiness Command	
ATTN: DRCPM-PBM	36
DRCPM-PBM-S	37
DRCPM-PBM-L	38-39
DRCPM-PBM-E	40-41
Dover, NJ 07801	
pover, No 07001	
Commander	
US Army Armament Materiel Readiness Command	42
ATTN: DRSAR-IRC	43-45
DRSAR-SF	46
DRSAR-SC	
DRSAR-EN	47
DRSAR-PPI	4.8
DRSAR-PPI-C	49
DRSAR-RD	5 0
DRSAR-IS	51
DRSAR-ASF	5 2
Rock Island, IL 61299	
Rook Tolundy 12 Class	
Director	
Ballistics Research Laboratory	
ARRADCOM	
ATTN: DRDAR-BL	53-55
Aberdeen Proving Ground, MD 21005	
a n .	
Corps of Engineers	
US Army Engineering Division	Г.
ATTN: HNDED-M	56
PO Box 1600 West Station	
Huntsville, AL 35807	
Commander	-
Radford Army Ammunition Plant	
ATTN: SARRA	5 7
Radford, VA 24141	
RAULUIU, VA 47474	

Commander	
Badger Army Ammunition Plant	F.0
ATTN: SARBA	58
Baraboo, WI 53913	
Commander	
Indiana Army Ammunition Plant	
ATTN: SARIN	59
Charlestown, IN 47111	
Commander	
Holston Army Ammunition Plant	
ATTN: SARHO	. 60
Kingsport, TN 37660	
Commander	
Lone Star Army Ammunition Plant	
ATTN: SARLS	61
Texarkana, TX 75501	
Commander	
Milan Army Ammunition Plant	
ATTN: SARMI	62
Milan, TN 38358	
Commander	
Iowa Army Ammunition Plant	. =
ATTN: SARIO	63
Burlington, IO 52601	
Commander	
Joliet Army Ammunition Plant	64
ATTN: SARJO	64
Joliet, IL 60436	
Commander	
Longhorn Army Ammunition Plant	65
ATTN: SARLO	0.3
Marshall, TX 75670	
Commander	
Louisiana Army Ammunition Plant	66
ATTN: SARLA	0.0
PO Box 30058	
Shreveport, LA 71130	
Commander	
Cornhusker Army Ammunition Plant	67
ATTN: SARCO	0 /
Grand Island, NB 68801	

Commander	
Ravenna Army Ammunition Plant	
ATTN: SARRV	68
Ravenna, OH 44266	
4 1	
Commander	
Newport Army Ammunition Plant	
ATTN: SARNE	69
PO Box 121	00
Newport, IN 47966	
Commander	
Volunteer Army Ammunition Plant	
ATTN: SARVO	70
Chattanooga, TN 37401	
Commander	
Kansas Army Ammunition Plant	
ATTN: SARKA	71
Parsons, KS 67357	
rursons, ko oroor	
District Engineer	
US Army Engineering District, Mobile	
Corps of Engineers	7 7
ATTN: SAM	72
PO Box 2288	
Mobile, AL 36628	
District Engineer	
US Army Engineering District, Ft. Worth	
Corps of Engineers	
ATTN: SWFED	73
PO Box 17300	
Fort Worth, TX 76102	
Tore worth, in rolos	
District Engineer	
District Engineer	
US Army Engineering District, Omaha	
Corps of Engineers	7.4
ATTN: MRDED	74
215 N 17th Street	
Omaha, NB 68102	
District Engineer	
US Army Engineering District, Baltimore	
Corps of Engineers	
ATTN: NAB	75
PO Box 1715	
Raltimore MD 21203	

District Engineer US Army Engineering District, Norfolk	
Corps of Engineers ATTN: NAOEN 803 Front Street Norfolk, VA 23510	7 (
Division Engineer US Army Engineering District, Huntsville Corps of Engineers ATTN: HNDED PO Box 1600 West Station Huntsville, AL 35807	7
Commanding Officer Naval Ordnance Station Indianhead, MD 20640	7
Weapon System Concept Team/CSL ATTN: DRDAR-ACW	79
Aberdeen Proving Ground, MD 21010 Technical Library ATTN: DRDAR-CLJ-L Aberdeen Proving Ground, MD 21010	80
Technical Library ATTN: DRDAR-TSB-S Aberdeen Proving Ground, MD 21005	81
Benet Weapons Laboratory Technical Library ATTN: DRDAR-LCB-TL Watervliet, NY 12189	82
Commander U.S. Army Armament Materiel Readiness Command ATTN: DRSAR-LEP-L Rock Island, IL 61299	83
U.S. Army Materiel Systems Analysis Activity ATTN: DRXSY-MP Aberdeen Proving Ground, MD 21005	84